



VÉRINS HYDRAULIQUES TÉLESCOPIQUES

Articulation supérieure - 8 expansions - série légère




P maxi de service : 200 bar - Poids total basculable : 18 tonnes à 180 bar

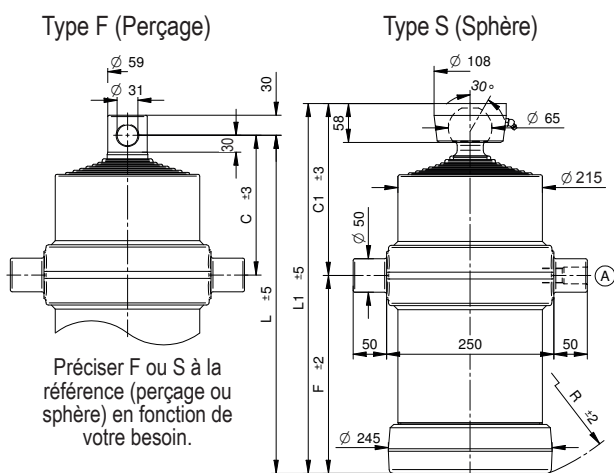

STANDARD



OPTIONS



| Course | Ø Expansions Tonnage | | | | | | | | C | C1 | F | L | L1 | R | L. expansion | Poids | | Volume d'huile | Référence |
|--------|----------------------|---------------|---------------|----------------|-----------------|-----------------|-----------------|-----------------|-----|-----|-----|-----|-----|-----|--------------|-----------------|-----|----------------|---------------------|
| | mm | Ø61 5,2 t. | Ø76 8,1 t. | Ø91 11,7 t. | Ø107 16,1 t. | Ø126 22,4 t. | Ø145 29,7 t. | Ø165 38,4 t. | | | | | | | | Ø187 49,4 t. | F | | |
| 1740 | • | • | • | • | • | • | • | • | 212 | 260 | 174 | 386 | 434 | 215 | 300 | 95 | 98 | 23 | 405.080.8019 S ou F |
| 1900 | • | • | • | • | • | • | • | • | 212 | 260 | 194 | 406 | 454 | 230 | 320 | 99 | 102 | 25 | 405.080.8020 S ou F |
| 2002 | • | • | • | • | • | • | • | • | 212 | 260 | 209 | 421 | 469 | 245 | 335 | 103 | 106 | 27 | 405.080.8021 S ou F |
| 2260 | • | • | • | • | • | • | • | • | 212 | 260 | 244 | 456 | 504 | 275 | 370 | 111 | 114 | 30 | 405.080.8022 S ou F |
| 2680 | • | • | • | • | • | • | • | • | 212 | 260 | 294 | 506 | 554 | 320 | 420 | 122 | 125 | 35 | 405.080.8023 S ou F |
| 2920 | • | • | • | • | • | • | • | • | 212 | 260 | 324 | 536 | 584 | 350 | 450 | 129 | 135 | 38,5 | 405.080.8024 S ou F |
| 3280 | • | • | • | • | • | • | • | • | 212 | 260 | 374 | 586 | 634 | 395 | 500 | 141 | 144 | 43 | 405.080.8025 S ou F |
| 3840 | • | • | • | • | • | • | • | • | 212 | 260 | 44 | 656 | 704 | 465 | 570 | 157 | 160 | 51 | 405.080.8027 S ou F |
| 4350 | • | • | • | • | • | • | • | • | 212 | 260 | 524 | 736 | 784 | 540 | 650 | 176 | 179 | 59 | 405.080.8028 S ou F |